


Parameters

Model	UF6.67(SMD)	UF8.33(SMD)	UF10(SMD)	UF16.67(DIP)
Pixel Pitch (mm)	6.66	8.33	10	16.66
Pixel Density (dot/m²)	22500	14400	10000	3600
LED Type	SMD2727	SMD3535	SMD3535	DIP346
Module Size(mm)	200*400	200*400	200*400	200*400
Horizontal Viewing Angle (Deg)	140	140	140	100
Vertical Viewing Angle (Deg)	Up20° Down60°	Up20° Down60°	Up20° Down60°	Up20° Down60°
Brightness (cd/m²)	5000-6000	5500-6500	5500-6500	8000-9000
Grey Scale(bit)	16	14	14	14
Refresh Rate (Hz)	≥1920	≥1920	≥1920	≥1920
Maximum Cabinet Power Consumption (w/sqm)	500(800*800)	900(1200*1200)	1000(1200*1200)	900(1200*1200)
Average Cabinet Power Consumption (w/sqm)	175(800*800)	360(1200*1200)	400(1200*1200)	360(1200*1200)
Cabinet Size (mm*mm)	800*800*105	1200*1200*105	1200*1200*105	1200*1200*105
Cabinet Weight (Kg)	24(800*800)	38(1200*1200)	38(1200*1200)	38(1200*1200)
Cabinet Resolution (PX*PX)	120*120(800*800)	144*144(1200*1200)	120*120(1200*1200)	72*72(1200*1200)
Input Voltage (V)	110-220V	110V-220V	110V-220V	110V-220V
Waterproof Level	Front IP65 Back IP54	Front IP65 Back IP54	Front IP65 Back IP54	Front IP65 Back IP54
Working Environment	Outdoor	Outdoor	Outdoor	Outdoor
Cabinet Material:	Fixed installation	Fixed installation	Fixed installation	Fixed installation

Reference Cases



Trump Tower, Turkey

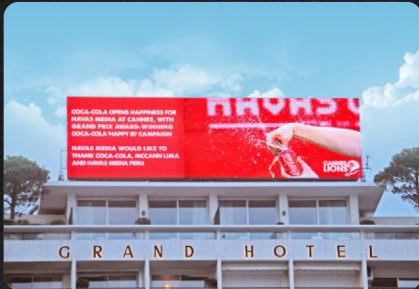


Cannes Grand Hotel top floor fixed installation



New Cairo Egypt fixed installation

CALKiN
digital solution

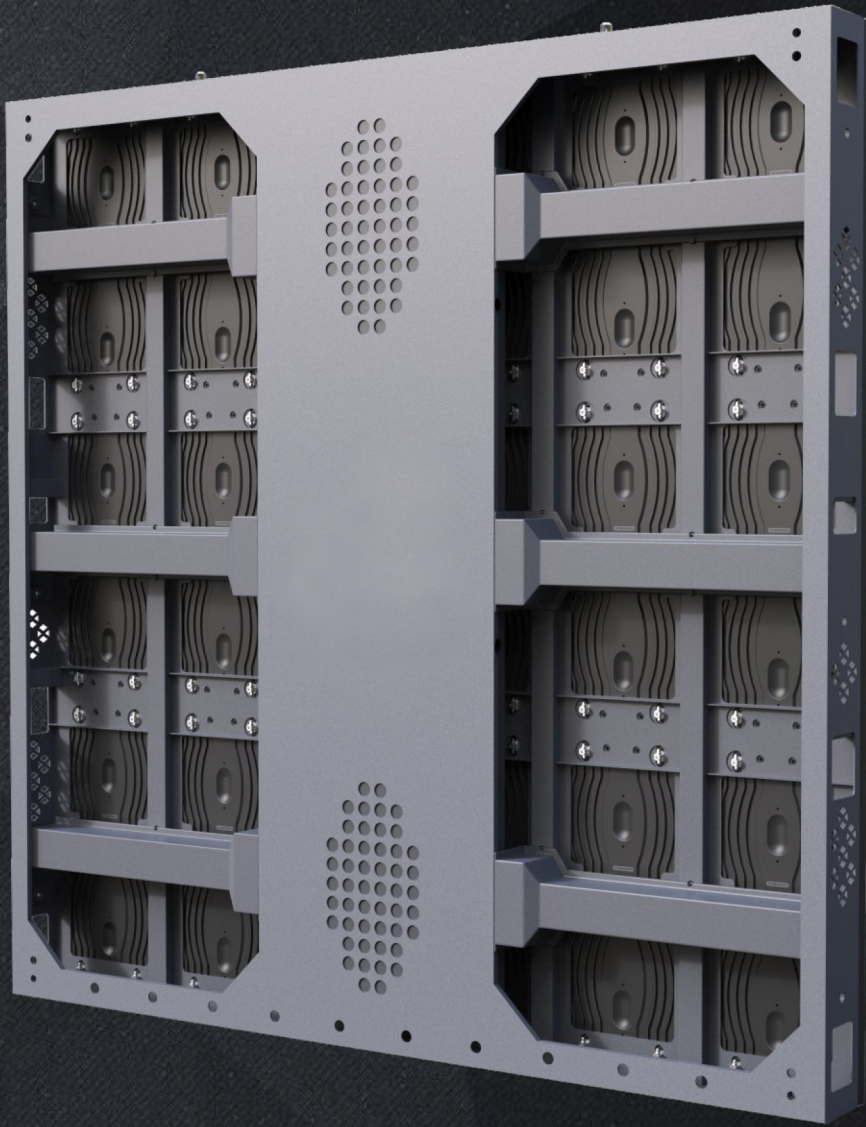

UF Series

P6.66 /8.33 /10 /16.66 Outdoor Adv

Front and back maintenance


A revolution of outdoor ad screens

CALKiN THAILAND


1006/429 B Floor Masterview Executive Place Charuennakorn Road, Bang Lumphu Lang, Khlongsan, Bangkok, Thailand
Tel: 02-8625459-60
Website: www.calkin-thailand.com

E-mail : merrexkable@gmail.com
request.digitalpro@gmail.com

◆ Product Appearance Diagram

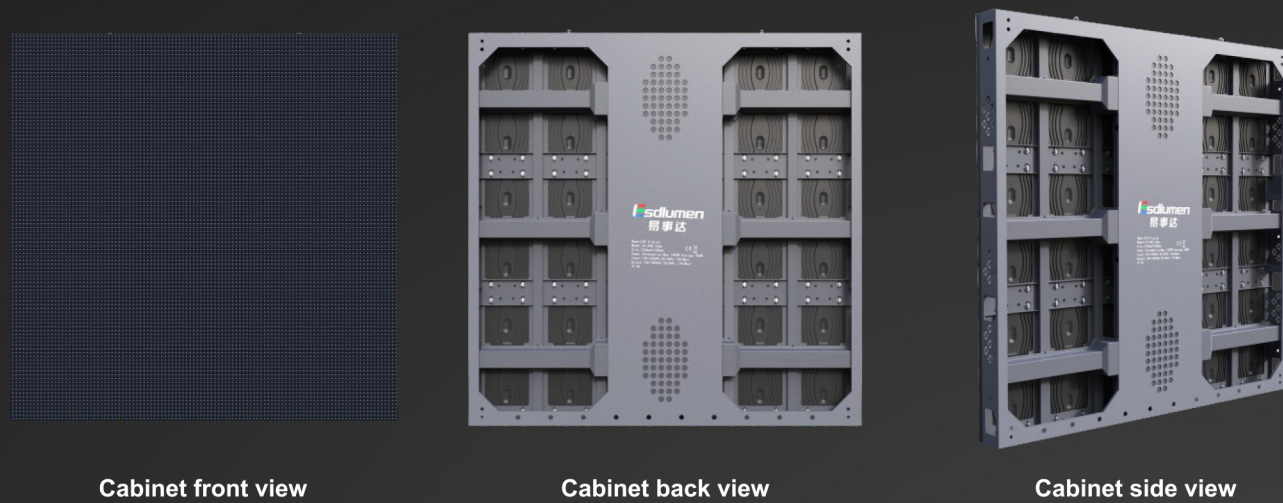


◆ Front maintenance Modules

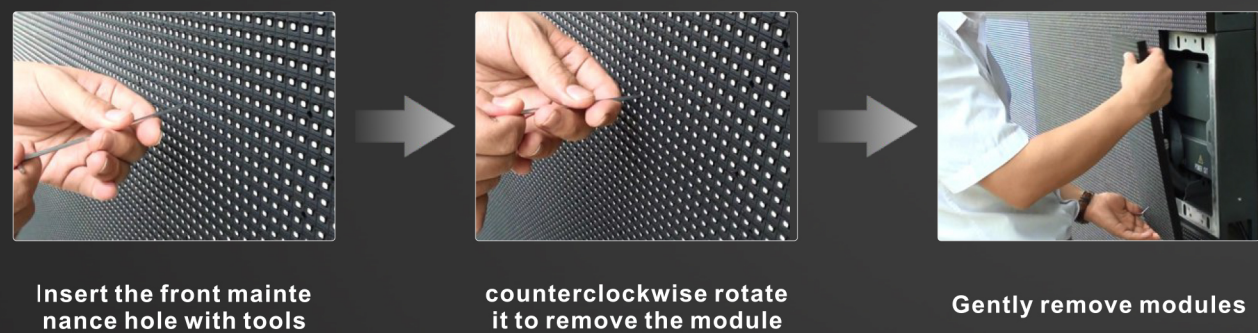

◆ Remove the wire cover



◆ Back Maintenance Modules

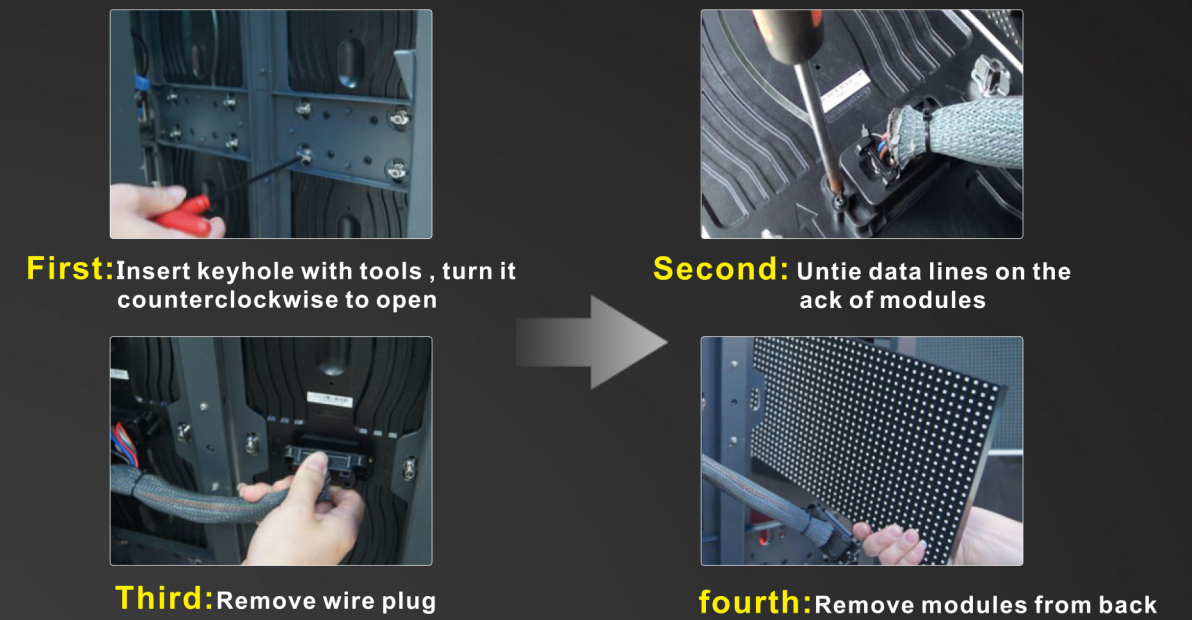

◆ Application reference

